

DISPLAY Elektronik GmbH

DATA SHEET

TFT MODULE

**DEM 80048001 VMH-PW-N
(A-TOUCH)**

7,0" TFT

Product Specification

Ver.: 2

17.08.2020

Revision History

| Revision | Date | Originator | Detail | Remarks |
|-----------------|-------------|-------------------|--|-----------------------------|
| 0 | 25.05.2020 | MHI | Initial Release | |
| 1 | 31.07.2020 | MH | Add Weight Add Current Consumption Add Chromacity Transmissive Modify Luminance Modify Outline Drawing | P5 P6 P8 P8 P27 |
| 2 | 17.08.2020 | MH | Modify Outline Drawing | P27 |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |
| | | | | |

Table of Contents

| No. | Item | Page |
|-------|--|------|
| 1. | General Description | 4 |
| 2. | Module Parameter | 4 |
| 3. | Absolute Maximum Ratings | 4 |
| 4. | DC Characteristics | 5 |
| 5. | Backlight Characteristic | 5 |
| 5.1. | Backlight Characteristic | 5 |
| 5.2. | Backlighting Circuit | 5 |
| 6. | Touch Screen Panel Specifications..... | 6 |
| 7. | Optical Characteristics | 7 |
| 7.1. | Optical Characteristics | 7 |
| 7.2. | Definition of Response Time | 7 |
| 7.3. | Definition of Contrast Ratio | 8 |
| 7.4. | Definition of Viewing Angles..... | 8 |
| 7.5. | Definition of Color Appearance | 9 |
| 7.6. | Definition of Surface Luminance, Uniformity and Transmittance..... | 9 |
| 8. | Block Diagram and Power Supply | 10 |
| 9. | Interface Pins Definition | 11 |
| 10. | AC Characteristics | 13 |
| 10.1. | Timing Characteristics of input signals | 13 |
| 10.2. | Data Input format | 13 |
| 10.3. | Timing..... | 14 |
| 11. | Quality Assurance | 15 |
| 11.1. | Purpose | 15 |
| 11.2. | Standard for Quality Test..... | 15 |
| 11.3. | Nonconforming Analysis & Disposition | 15 |
| 11.4. | Agreement Items..... | 15 |
| 11.5. | Standard of the Product Visual Inspection | 15 |
| 11.6. | Inspection Specification | 16 |
| 11.7. | Classification of Defects..... | 21 |
| 11.8. | Identification/marketing criteria | 21 |
| 11.9. | Packing | 21 |
| 12. | Reliability Specification | 22 |
| 13. | Precautions and Warranty | 23 |
| 13.1. | Safety | 23 |
| 13.2. | Handling | 23 |
| 13.3. | Storage..... | 23 |
| 13.4. | Metal Pin (Apply to Products with Metal Pins) | 23 |
| 13.5. | Operation | 24 |
| 13.6. | Static Electricity | 24 |
| 13.7. | Limited Warranty | 24 |
| 14. | Outline Drawing | 25 |

1. General Description

The specification is a transmissive type color active matrix liquid crystal display (LCD) which uses amorphous thin film transistor (TFT) as switching devices. This product is composed of a TFT-LCD panel, driver ICs, a touch panel and a backlight unit.

2. Module Parameter

| Features | Details | Unit |
|-----------------------------|-------------------------------|------------|
| Display Size(Diagonal) | 7.0" | - |
| LCD Type | MVA TFT | - |
| Display Mode | Transmissive / Normally White | - |
| Resolution | 800 x RGB x 480 | Pixels |
| View Direction | Full Viewing | Best Image |
| Module Outline | 165.00 x 104.00 x 4.70 | mm |
| Active Area | 154.08 x 85.92 | mm |
| Pixel Size | 0.1926 x 0.1790 | mm |
| Pixel Arrangement | RGB- Island | - |
| Polarizer Surface Treatment | Anti-Glare | - |
| Driver IC | EK9713& EK73002 | - |
| Display Colors | 16.7 Million | - |
| Interface | 24-Bits-RGB Interface | - |
| With or Without Touch Panel | With 4-Wire-Resistive Touch | - |
| Operating Temperature | -20~70 | °C |
| Storage Temperature | -30~80 | °C |
| Weight | 157 | g |

Note 1: Exclusive hooks, post, FFC/FPC tail etc.

3. Absolute Maximum Ratings

V_{SS}=0V, Ta=25°C

| Item | Symbol | Min. | Max. | Unit |
|-----------------------|------------------|------|------|------|
| Power Supply Voltage | VDD | -0.3 | 5.0 | V |
| Storage Temperature | T _{STG} | -30 | +80 | °C |
| Operating Temperature | T _{OP} | -20 | +70 | °C |

Note 1: If Ta below 50°C, the maximal humidity is 90%RH, if Ta over 50°C, absolute humidity should be less than 60%RH.

Note 2: The response time will be extremely slow when the operating temperature is around -10°C, and the back ground will become darker at high temperature operating.

4. DC Characteristics

| Item | Symbol | Min. | Typ. | Max. | Unit |
|----------------------------------|-----------------|---------|------|---------|------|
| Supply Voltage | VDD | 3.0 | 3.3 | 3.6 | V |
| Logic Low Input Voltage | V _{IL} | GND | - | 0.3*VDD | V |
| Logic High Input Voltage | V _{IH} | 0.7*VDD | - | VDD | V |
| Current Consumption All Black | Logic | IVDD | 90 | - | mA |
| | Analog | | | | |


5. Backlight Characteristic

5.1. Backlight Characteristic

| Item | Symbol | Condition | Min. | Typ. | Max. | Unit |
|---------------------|--|------------------------------------|-------|--------|------|------|
| Backlight Voltage | VLED | Ta=25 °C, I _F =20mA/LED | 8.7 | 9.6 | 9.9 | V |
| Backlight Current | I _{LED} | Ta=25 °C, V _F =3.2V/LED | - | 180 | - | mA |
| Power Dissipation | PD | - | - | 1728 | - | mW |
| Uniformity | Avg | - | 70 | 75 | - | % |
| LED Lifetime (25°C) | - | - | 20000 | 30,000 | - | Hrs |
| Drive Method | Constant Current | | | | | |
| LED Configuration | 27 White LEDs (3 LEDs in one string and 9 groups in parallel) | | | | | |

Note1: LED life time defined as follows: The final brightness is at 50% of original brightness.
 The environmental conducted under ambient air flow, at Ta=25°C±2°C, 60%RH±5%,
 I_F=20mA/LED.

5.2. Backlighting Circuit

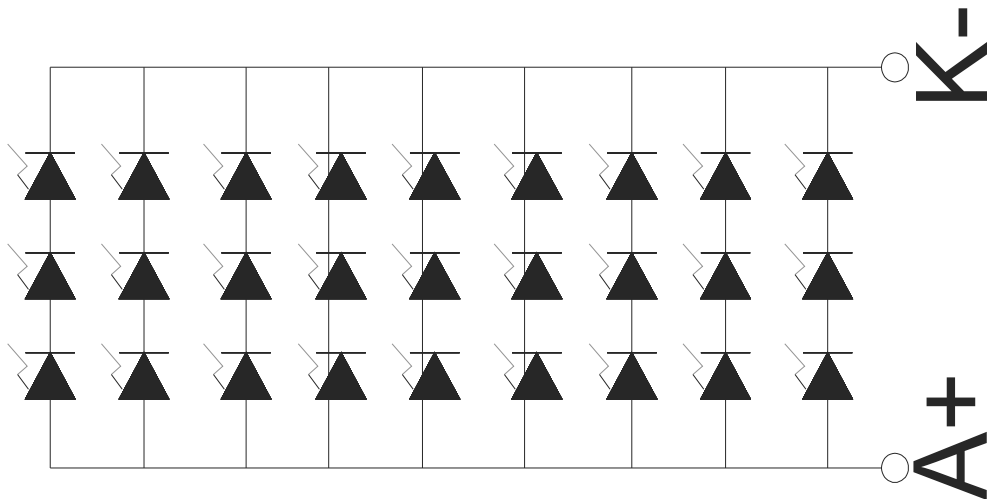

6. Touch Screen Panel Specifications**6.1 Electrical Characteristics**

| Item | Min. | Typ. | Max. | Unit | Note |
|-----------------------|------|------|------|------------|---------------------------|
| Linearity | -3 | - | 3 | % | Analog X and Y directions |
| Terminal Resistance | 50 | - | 400 | Ω | X (Film side) |
| | 350 | - | 1100 | Ω | Y (Glass side) |
| Insulation Resistance | 20 | - | - | M Ω | DC \leq 10V |
| Voltage | - | - | 10 | V | DC |
| Chattering | - | - | 10 | ms | |

Caution (1) : Do not operate it with a thing except a polyacetal pen (tip R0.8mm or less) or a finger, especially those with hard or sharp tips such as a ball point pen or a mechanical pencil.

6.2 Mechanical & Reliability Characteristics

| Item | Min. | Typ. | Max. | Unit | Note |
|-------------------------------|-----------------|------|------|------------|------|
| Activation Force | 10 | - | 100 | g | (1) |
| Durability-Surface Scratching | Write 20,000 | - | - | characters | (2) |
| Durability-Surface Pitting | 1,000,000 | - | - | touches | (3) |
| Surface Hardness | 3 | - | - | H | |

Note (1) Stylus pen Input: R0.8mm polyacetal pen or Finger

Note (2) Measurement for Surface area.

- Force: 150-250gf
- Speed: 60mm/sec
- Stylus: R0.8 polyacetal pen or Finger

Note (3) Pit 1,000,000 times on the Film with a R3.75 silicon rubber.

- Force: Force: 2.45N
- Speed: 3times/sec

7. Optical Characteristics


7.1. Optical Characteristics

Ta=25°C, DVDD=3.3V

| | Item | Symbol | Condition | Specification | | | Unit | |
|----------------------------------|--|----------------|--|---------------|-------|-------|-------------------|--|
| | | | | Min. | Typ. | Max. | | |
| Backlight On (Transmissive Mode) | Luminance On TFT($I_f=20\text{mA/LED}$) | Lv | Normally viewing angle $\theta_x = \phi_y = 0^\circ$ | 312 | 390 | - | cd/m ² | |
| | Contrast Ratio(See 7.3) | CR | | 500 | 800 | - | | |
| | Response Time (See 7.2) | TR+TF | | - | 25 | 50 | ms | |
| | Chromaticity Transmissive (See 7.5) | Red | X _R | Center CR≥10 | 0.517 | 0.567 | 0.617 | |
| | | | Y _R | | 0.287 | 0.337 | 0.387 | |
| | | Green | X _G | | 0.275 | 0.325 | 0.375 | |
| | | | Y _G | | 0.564 | 0.614 | 0.664 | |
| | | Blue | X _B | | 0.092 | 0.142 | 0.192 | |
| | | | Y _B | | 0.030 | 0.080 | 0.130 | |
| | White | X _w | 0.245 | 0.295 | 0.345 | | | |
| Y _w | | 0.281 | 0.331 | 0.381 | | | | |
| Viewing Angle (See 7.4) | Horizontal | θ_{x+} | Center CR≥10 | 60 | 75 | - | Deg. | |
| | | θ_{x-} | | 60 | 75 | - | | |
| | Vertical | ϕ_{y+} | | 60 | 75 | - | | |
| | | ϕ_{y-} | | 60 | 75 | - | | |
| NTSC Ratio(Gamut) | | | | 41 | 51 | - | % | |

7.2. Definition of Response Time

7.2.1. Normally Black Type (Negative)

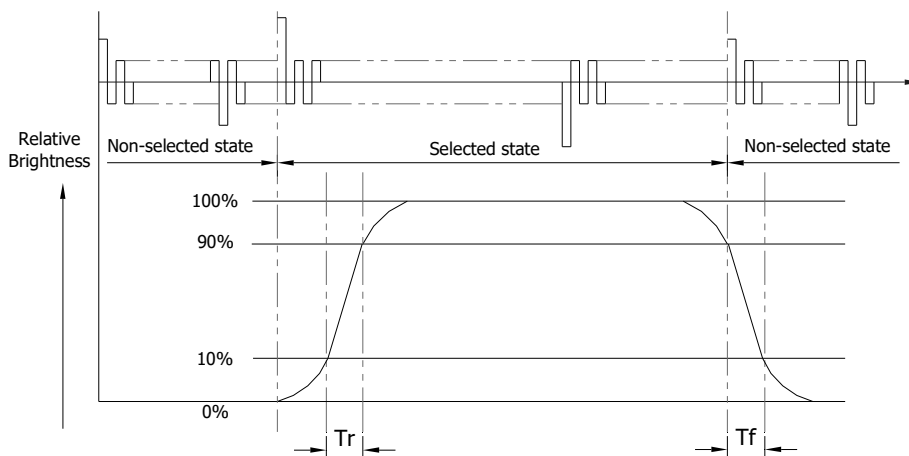


Tr is the time it takes to change form non-selected stage with relative luminance 10% to selected state with relative luminance 90%;

Tf is the time it takes to change from selected state with relative luminance 90% to non-selected state with relative luminance 10%.

Note: Measuring machine: LCD-5100

7.2.2. Normally White Type (Positive)

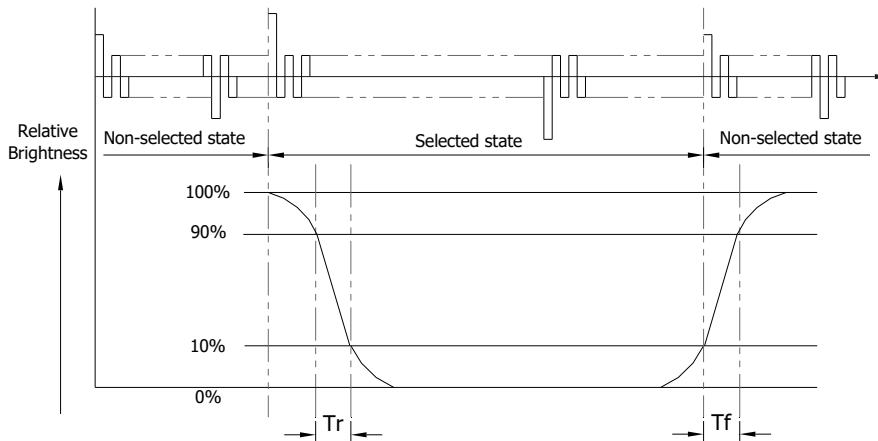

Tr is the time it takes to change from non-selected stage with relative luminance 90% to selected state with relative luminance 10%;

Tf is the time it takes to change from selected state with relative luminance 10% to non-selected state with relative luminance 90%;

Note: Measuring machine: LCD-5100 or EQUI

7.3. Definition of Contrast Ratio


Contrast is measured perpendicular to display surface in reflective and transmissive mode.

The measurement condition is:

| | |
|--------------------------|--------------------------|
| Measuring Equipment | Eldim or Equivalent |
| Measuring Point Diameter | 3mm//1mm |
| Measuring Point Location | Active Area centre point |
| Test Pattern | A: All Pixels white |
| | B: All Pixel black |
| Contrast Setting | Maximum |

Definitions: CR (Contrast) = Luminance of White Pixel / Luminance of Black Pixel

7.4. Definition of Viewing Angles

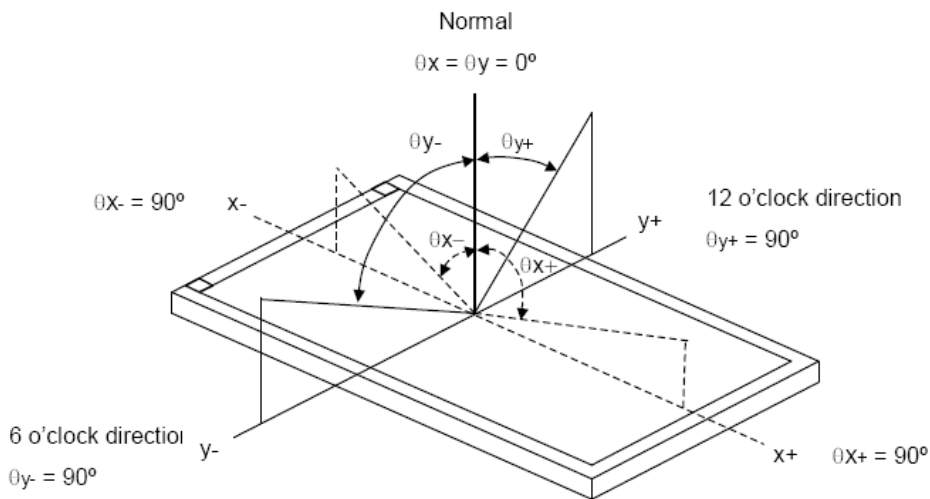


Measuring machine: LCD-5100 or EQUI

7.5. Definition of Color Appearance

R, G, B and W are defined by (x, y) on the IE chromaticity diagram

NTSC=area of RGB triangle/area of NTSC triangleX100%

Measuring picture: Red, Green, Blue and White (Measuring machine: BM-7)

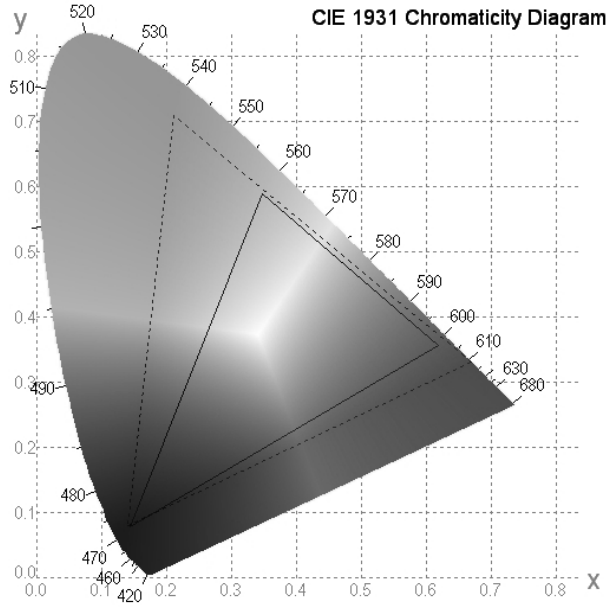

7.6. Definition of Surface Luminance, Uniformity and Transmittance


Using the transmissive mode measurement approach, measure the white screen luminance of the display panel and backlight.

7.6.1. Surface Luminance: $L_v = \text{average} (L_{P1}:L_{P9})$


7.6.2. Uniformity = $\text{Minimal} (L_{P1}:L_{P9}) / \text{Maximal} (L_{P1}:L_{P9}) * 100\%$

7.6.3. Transmittance = $L_v \text{ on LCD} / L_v \text{ on Backlight} * 100\%$

Note: Measuring machine: BM-7

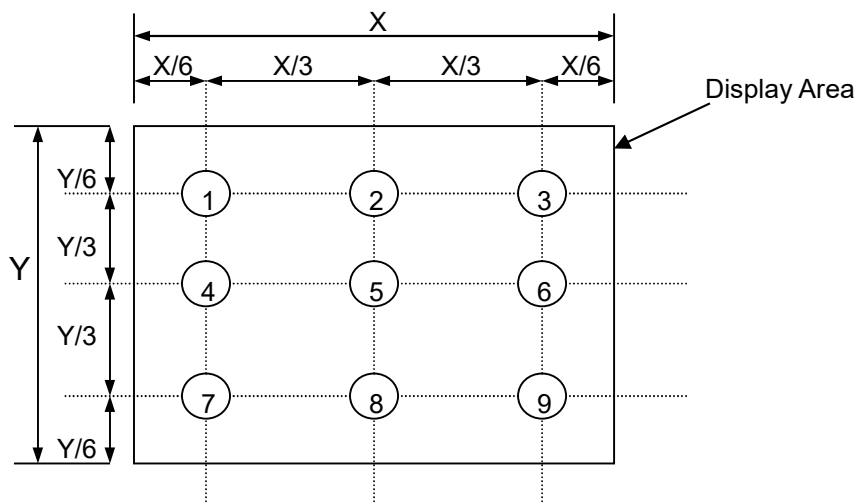

8. Block Diagram and Power Supply

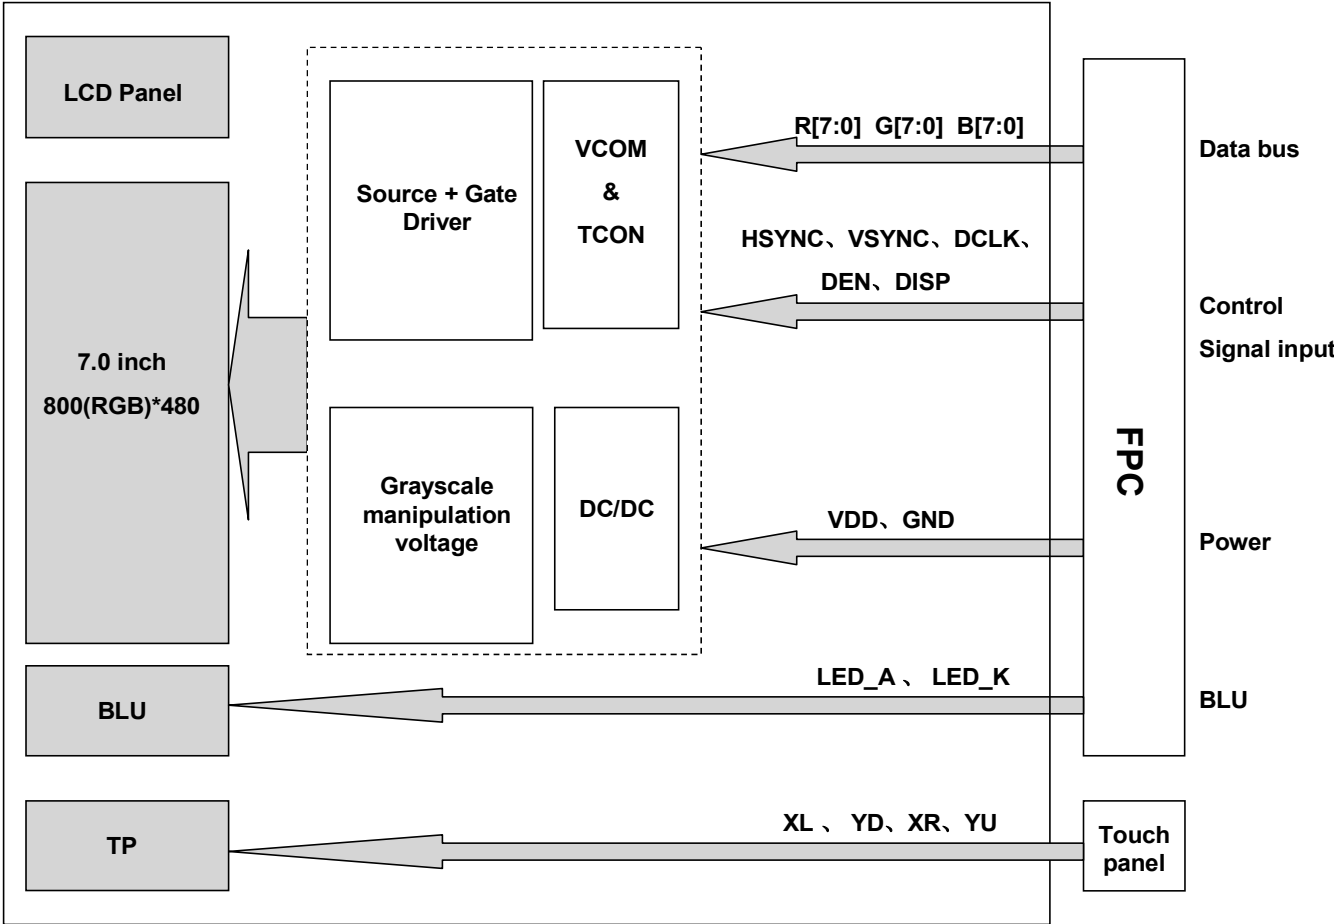

9. Interface Pins Definition

| No. | Symbol | Function |
|-----|--------|---|
| 1 | LED_K | LED backlight(Cathode) |
| 2 | LED_A | LED backlight(Anode) |
| 3 | GND | Ground |
| 4 | VDD | Power supply |
| 5 | R0 | Red Data |
| 6 | R1 | Red Data |
| 7 | R2 | Red Data |
| 8 | R3 | Red Data |
| 9 | R4 | Red Data |
| 10 | R5 | Red Data |
| 11 | R6 | Red Data |
| 12 | R7 | Red Data |
| 13 | G0 | Green Data |
| 14 | G1 | Green Data |
| 15 | G2 | Green Data |
| 16 | G3 | Green Data |
| 17 | G4 | Green Data |
| 18 | G5 | Green Data |
| 19 | G6 | Green Data |
| 20 | G7 | Green Data |
| 21 | B0 | Blue Data |
| 22 | B1 | Blue Data |
| 23 | B2 | Blue Data |
| 24 | B3 | Blue Data |
| 25 | B4 | Blue Data |
| 26 | B5 | Blue Data |
| 27 | B6 | Blue Data |
| 28 | B7 | Blue Data |
| 29 | GND | Ground |
| 30 | DCLK | Dot data clock |
| 31 | DISP | Display on/off. DISP=1:Display on. |
| 32 | HSYNC | Horizontal sync input in RGB mode(short to GND if not used) |
| 33 | VSYNC | Vertical sync input in RGB mode(short to GND if not used) |
| 34 | DEN | Data Enable. Active high to enable the data input bus. |
| 35 | NC | No connection |
| 36 | GND | Ground |
| 37 | NC(XR) | No connection |
| 38 | NC(YD) | No connection |
| 39 | NC(XL) | No connection |
| 40 | NC(YU) | No connection |

PIN Assignment


| No. | Symbol | Function |
|------------|---------------|----------------------|
| 1 | XL | Touch panel terminal |
| 2 | YD | Touch panel terminal |
| 3 | XR | Touch panel terminal |
| 4 | YU | Touch panel terminal |

10. AC Characteristics


10.1. Timing Characteristics of input signals

| Parameter | Symbol | Spec. | | | Unit |
|------------------------|-----------|-------|------|------|------|
| | | Min. | typ. | Max. | |
| HS setup time | T_{hst} | 8 | - | - | ns |
| HS hold time | T_{hhd} | 8 | - | - | ns |
| VS setup time | T_{vst} | 8 | - | - | ns |
| VS hold time | T_{vhd} | 8 | - | - | ns |
| Data setup time | T_{dsu} | 8 | - | - | ns |
| Data hold time | T_{dhd} | 8 | - | - | ns |
| DE setup time | T_{esu} | 8 | - | - | ns |
| DE hold time | T_{ehd} | 8 | - | - | ns |
| VDD Power On Slew rate | T_{POR} | - | - | 20 | ms |
| RSTB pulse width | T_{Rst} | 10 | - | - | us |
| CLKIN cycle time | T_{cph} | 20 | - | - | ns |
| CLKIN pulse duty | T_{cwh} | 40 | 50 | 60 | % |
| Output stable time | T_{sst} | - | - | 6 | us |

10.2. Data Input format

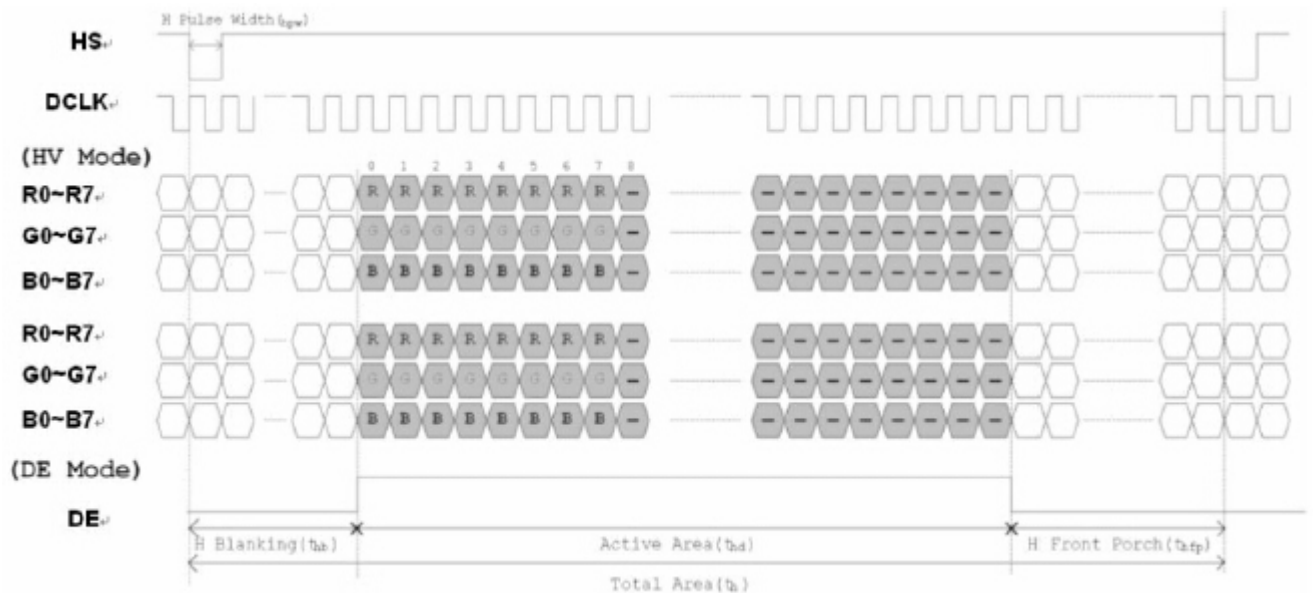

Horizontal input timing diagram

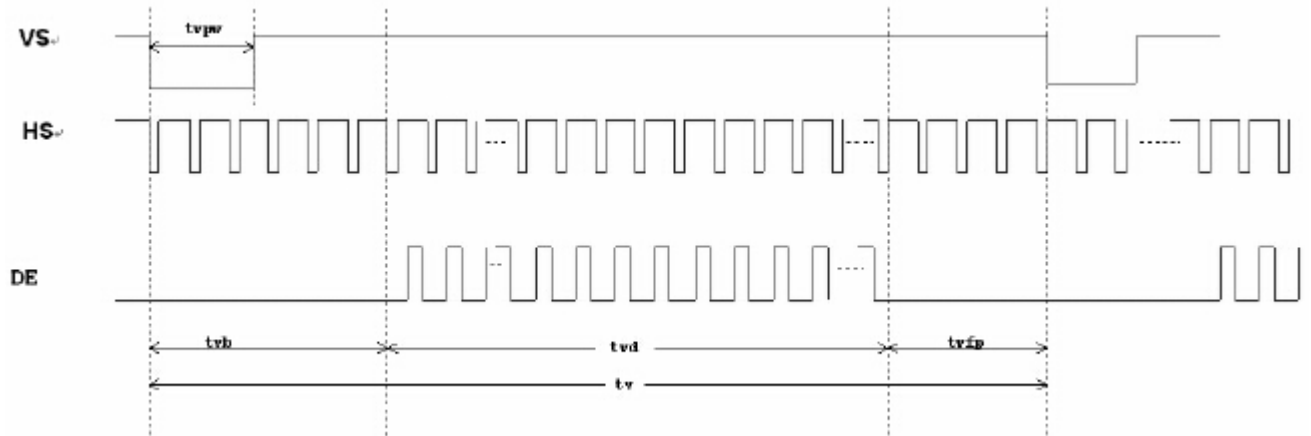

Vertical input timing diagram

10.3. Timing

| Item | Symbol | Values | | | Unit | Remark |
|-------------------------|--------|--------|------|------|------|--------|
| | | Min. | Typ. | Max. | | |
| Horizontal Display Area | thd | -- | 800 | -- | DCLK | |
| DCLK Frequency | fclk | 26.4 | 33.3 | 46.8 | MHz | |
| One Horizontal Line | th | 862 | 1056 | 1200 | DCLK | |
| HS Pulse Width | thpw | 1 | -- | 40 | DCLK | |
| HS Blanking | thb | 46 | 46 | 46 | DCLK | |
| HS Front Porch | thfp | 16 | 210 | 354 | DCLK | |

| Item | Symbol | Values | | | Unit | Remark |
|-----------------------|--------|--------|------|------|------|--------|
| | | Min. | Typ. | Max. | | |
| Vertical Display Area | tvd | -- | 480 | -- | TH | |
| VS Period Time | tv | 510 | 525 | 650 | TH | |
| VS Pulse Width | tvpw | 1 | -- | 20 | TH | |
| VS Blanking | tvb | 23 | 23 | 23 | TH | |
| VS Front Porch | tvfp | 7 | 22 | 147 | TH | |

11. Quality Assurance

11.1.Purpose

This standard for Quality Assurance assures the quality of LCD module products supplied to customer.

11.2.Standard for Quality Test

11.2.1. Sampling Plan:

GB2828.1-2012

Single sampling, general inspection level II

11.2.2. Sampling Criteria:

Visual inspection: AQL 1.5

Electrical functional: AQL 0.65.

11.2.3. Reliability Test:

Detailed requirement refer to Reliability Test Specification.

11.3.Nonconforming Analysis & Disposition

11.3.1. Nonconforming analysis:

11.3.1.1. Customer should provide overall information of non-conforming sample for their complaints.

11.3.1.2. After receipt of detailed information from customer, the analysis of nonconforming parts usually should be finished in one week.

11.3.1.3. If cannot finish the analysis on time, customer will be notified with the progress status.

11.3.2. Disposition of nonconforming:

11.3.2.1. Non-conforming product over PPM level will be replaced.

11.3.2.2. The cause of non-conformance will be analyzed. Corrective action will be discussed and implemented.

11.4.Agreement Items

Shall negotiate with customer if the following situation occurs:

11.4.1. There is any discrepancy in standard of quality assurance.

11.4.2. Additional requirement to be added in product specification.

11.4.3. Any other special problem.


11.5.Standard of the Product Visual Inspection

11.5.1. Appearance inspection:

11.5.1.1. The inspection must be under illumination about 1000 – 1500 lx, and the distance of view must be at 30cm ± 2cm.

11.5.1.2. The viewing angle should be 45° from the vertical line without reflection light or follows customer's viewing angle specifications.

11.5.1.3. Definition of area: A Zone: Active Area, B Zone: Viewing Area,

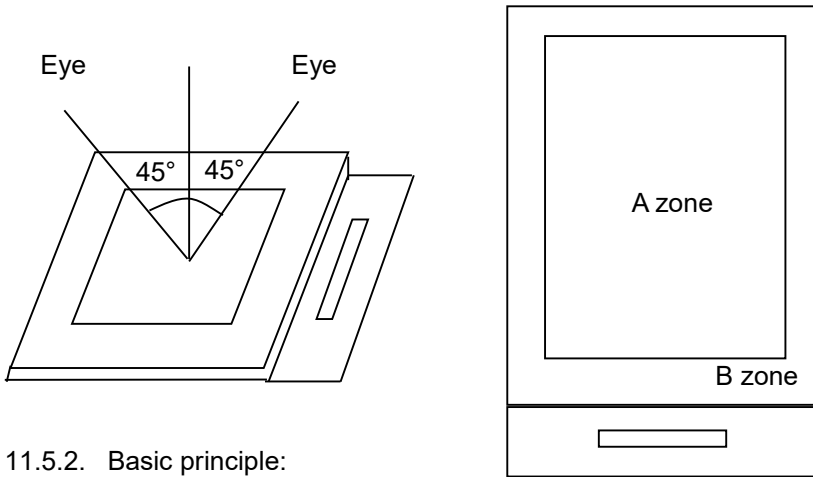




11.5.2. Basic principle:




11.5.2.1. A set of sample to indicate the limit of acceptable quality level must be discussed by both us and customer when there is any dispute happened.





11.5.2.2. New item must be added on time when it is necessary.


11.6. Inspection Specification
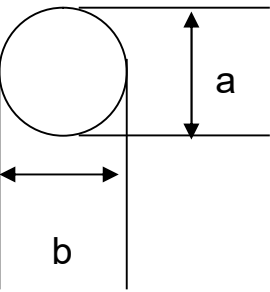
| No. | Item | Criteria (Unit: mm) | | | | | | | | | | | | | | | | | | |
|-------------------------|---|---|------------|--------------|----------|------------------|--|------------|-------------------------|----------|------------|---------------|-----------|------------|------------|--|------|------------------------------------|--|--------|
| 01 | Black / White Spot Foreign Material (Round Type) Pinholes Stain Particles Inside cell. (Minor Defect) |  <table border="1" data-bbox="909 929 1412 1153"> <thead> <tr> <th>Size</th> <th>Area</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$\phi \leq 0.20$</td> <td></td> <td>Ignore</td> </tr> <tr> <td>$0.20 < \phi \leq 0.50$</td> <td></td> <td>$N \leq 3$</td> </tr> <tr> <td>$0.50 < \phi$</td> <td></td> <td>0</td> </tr> </tbody> </table> <p>$\phi = (a + b) / 2$ Distance between 2 defects should more than 5mm apart.</p> | Size | Area | Acc. Qty | $\phi \leq 0.20$ | | Ignore | $0.20 < \phi \leq 0.50$ | | $N \leq 3$ | $0.50 < \phi$ | | 0 | | | | | | |
| Size | Area | Acc. Qty | | | | | | | | | | | | | | | | | | |
| $\phi \leq 0.20$ | | Ignore | | | | | | | | | | | | | | | | | | |
| $0.20 < \phi \leq 0.50$ | | $N \leq 3$ | | | | | | | | | | | | | | | | | | |
| $0.50 < \phi$ | | 0 | | | | | | | | | | | | | | | | | | |
| 02 | Electrical Defect (Minor Defect) | <table border="1" data-bbox="550 1366 1412 1590"> <thead> <tr> <th>Bright dot</th> <th>Display Area</th> <th>Total</th> <th rowspan="3">Note1</th> </tr> </thead> <tbody> <tr> <td></td> <td>$N \leq 2$</td> <td>$N \leq 2$</td> </tr> <tr> <td>Dark dot</td> <td>$N \leq 4$</td> <td>$N \leq 4$</td> </tr> <tr> <td>Total dot</td> <td>$N \leq 4$</td> <td>$N \leq 4$</td> <td></td> </tr> <tr> <td>Mura</td> <td colspan="2">Not visible through 5% ND filters.</td> <td>Note 2</td> </tr> </tbody> </table> <p>Remark: 1. Bright dot caused by scratch and foreign object accords to item 1.</p> | Bright dot | Display Area | Total | Note1 | | $N \leq 2$ | $N \leq 2$ | Dark dot | $N \leq 4$ | $N \leq 4$ | Total dot | $N \leq 4$ | $N \leq 4$ | | Mura | Not visible through 5% ND filters. | | Note 2 |
| Bright dot | Display Area | Total | Note1 | | | | | | | | | | | | | | | | | |
| | $N \leq 2$ | $N \leq 2$ | | | | | | | | | | | | | | | | | | |
| Dark dot | $N \leq 4$ | $N \leq 4$ | | | | | | | | | | | | | | | | | | |
| Total dot | $N \leq 4$ | $N \leq 4$ | | | | | | | | | | | | | | | | | | |
| Mura | Not visible through 5% ND filters. | | Note 2 | | | | | | | | | | | | | | | | | |
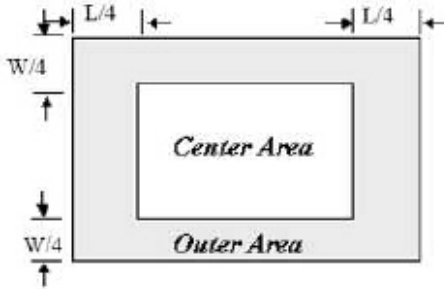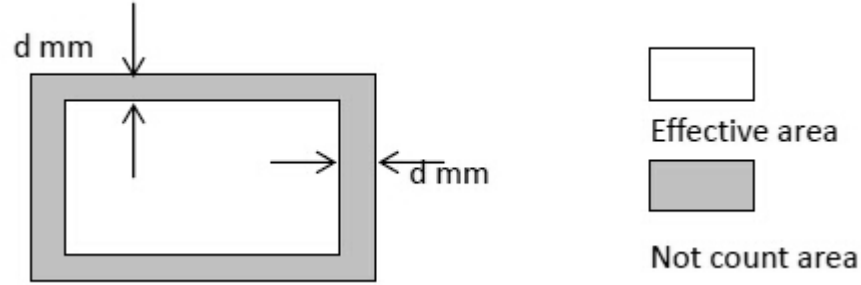
| 03 | Inactive Area (Minor Defect) | <p>Line Criteria: $L \leq 1\text{mm}$, $W \leq 0.1\text{mm}$, Dot Criteria: Please refer to Note 1,2&3 Note1: Definition of Area</p>  <p>Note2:</p> <table border="1" data-bbox="531 701 1455 1075"> <thead> <tr> <th>尺寸</th> <th>缺陷</th> <th>中心 Center</th> <th>外圍 Outer</th> <th>總數 Total</th> <th>備註</th> </tr> </thead> <tbody> <tr> <td>All</td> <td>$\varnothing < 0.2\text{mm}$;</td> <td colspan="4" style="text-align: center;">不計數</td> </tr> <tr> <td><6°</td> <td>$0.2 \leq \varnothing \leq 0.3\text{mm}$; $L \leq 1\text{mm}, W \leq 0.1\text{mm}$</td> <td>$N \leq 1$</td> <td>$N \leq 2$</td> <td>$N \leq 3$</td> <td></td> </tr> <tr> <td>6~8°</td> <td>$0.2 \leq \varnothing \leq 0.5\text{mm}$; $L \leq 1\text{mm}, W \leq 0.1\text{mm}$</td> <td>$N \leq 2$</td> <td>$N \leq 3$</td> <td>$N \leq 5$</td> <td>0.4 ≤ ∅ ≤ 0.5mm, N ≤ 1 is allowed at outer.)</td> </tr> <tr> <td>8.1°~10.1°</td> <td>$0.2 \leq \varnothing \leq 0.5\text{mm}$; $L \leq 1\text{mm}, W \leq 0.1\text{mm}$</td> <td>$N \leq 2$</td> <td>$N \leq 5$</td> <td>$N \leq 7$</td> <td>0.4 ≤ ∅ ≤ 0.5mm, N ≤ 2 is allowed at outer.)</td> </tr> <tr> <td>10.2°~15°</td> <td>$0.2 \leq \varnothing \leq 0.5\text{mm}$; $L \leq 1\text{mm}, W \leq 0.1\text{mm}$</td> <td>$N \leq 5$</td> <td>$N \leq 10$</td> <td>$N \leq 15$</td> <td>(0.4 ≤ ∅ ≤ 0.5mm, N ≤ 5 is allowed at outer.)</td> </tr> </tbody> </table> <p>Note3: Inactive area $D < 0.2\text{mm}$ is not counted without appearance observation. Remark: Effective area is from the POL cutting side to 0.5mm of inside. This is no count area. Other part is effective area. In no count area, any defect can ignore. In effective area, have to judge from above-mentioned specification.</p>  | 尺寸 | 缺陷 | 中心 Center | 外圍 Outer | 總數 Total | 備註 | All | $\varnothing < 0.2\text{mm}$; | 不計數 | | | | <6° | $0.2 \leq \varnothing \leq 0.3\text{mm}$; $L \leq 1\text{mm}, W \leq 0.1\text{mm}$ | $N \leq 1$ | $N \leq 2$ | $N \leq 3$ | | 6~8° | $0.2 \leq \varnothing \leq 0.5\text{mm}$; $L \leq 1\text{mm}, W \leq 0.1\text{mm}$ | $N \leq 2$ | $N \leq 3$ | $N \leq 5$ | 0.4 ≤ ∅ ≤ 0.5mm, N ≤ 1 is allowed at outer.) | 8.1°~10.1° | $0.2 \leq \varnothing \leq 0.5\text{mm}$; $L \leq 1\text{mm}, W \leq 0.1\text{mm}$ | $N \leq 2$ | $N \leq 5$ | $N \leq 7$ | 0.4 ≤ ∅ ≤ 0.5mm, N ≤ 2 is allowed at outer.) | 10.2°~15° | $0.2 \leq \varnothing \leq 0.5\text{mm}$; $L \leq 1\text{mm}, W \leq 0.1\text{mm}$ | $N \leq 5$ | $N \leq 10$ | $N \leq 15$ | (0.4 ≤ ∅ ≤ 0.5mm, N ≤ 5 is allowed at outer.) |
|------------|--|--|-------------|--------------|---|-------------|-------------|----|-----|--------------------------------|-----|--|--|--|-----|--|------------|------------|------------|--|------|--|------------|------------|------------|--|------------|--|------------|------------|------------|--|-----------|--|------------|-------------|-------------|---|
| | | 尺寸 | 缺陷 | 中心 Center | 外圍 Outer | 總數 Total | 備註 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| All | $\varnothing < 0.2\text{mm}$; | 不計數 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| <6° | $0.2 \leq \varnothing \leq 0.3\text{mm}$; $L \leq 1\text{mm}, W \leq 0.1\text{mm}$ | $N \leq 1$ | $N \leq 2$ | $N \leq 3$ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 6~8° | $0.2 \leq \varnothing \leq 0.5\text{mm}$; $L \leq 1\text{mm}, W \leq 0.1\text{mm}$ | $N \leq 2$ | $N \leq 3$ | $N \leq 5$ | 0.4 ≤ ∅ ≤ 0.5mm, N ≤ 1 is allowed at outer.) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 8.1°~10.1° | $0.2 \leq \varnothing \leq 0.5\text{mm}$; $L \leq 1\text{mm}, W \leq 0.1\text{mm}$ | $N \leq 2$ | $N \leq 5$ | $N \leq 7$ | 0.4 ≤ ∅ ≤ 0.5mm, N ≤ 2 is allowed at outer.) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| 10.2°~15° | $0.2 \leq \varnothing \leq 0.5\text{mm}$; $L \leq 1\text{mm}, W \leq 0.1\text{mm}$ | $N \leq 5$ | $N \leq 10$ | $N \leq 15$ | (0.4 ≤ ∅ ≤ 0.5mm, N ≤ 5 is allowed at outer.) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
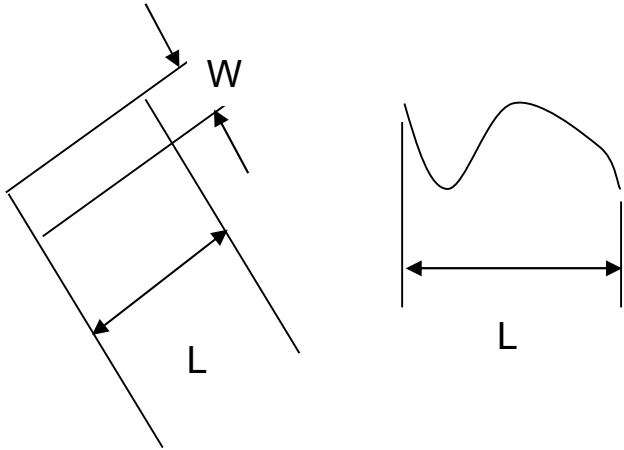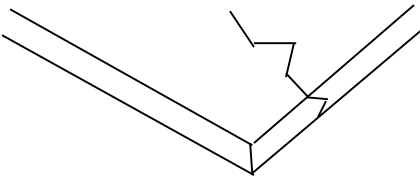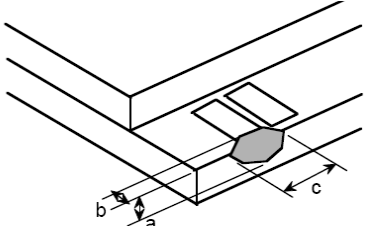
| <p>04</p> | <p>Black and White Line Scratch Foreign Material (Line Type) (Minor Defect)</p> |  <table border="1" data-bbox="608 721 1235 983"> <thead> <tr> <th>Length</th> <th>Width</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>/</td> <td>$W \leq 0.1$</td> <td>Ignore</td> </tr> <tr> <td>$L \leq 2.5$</td> <td>$0.1 < W \leq 0.2$</td> <td>3</td> </tr> <tr> <td>$L > 2.5$</td> <td>$0.2 < W$</td> <td>0</td> </tr> <tr> <td colspan="2">Total</td> <td>3</td> </tr> </tbody> </table> <p>Distance between 2 defects should more than 3mm apart. Scratches not viewable through the back of the display are acceptable.</p> | Length | Width | Acc. Qty | / | $W \leq 0.1$ | Ignore | $L \leq 2.5$ | $0.1 < W \leq 0.2$ | 3 | $L > 2.5$ | $0.2 < W$ | 0 | Total | | 3 |
|------------------------------|--|---|------------------|----------|--------------------|---|--------------------|--------|------------------------------|--------------------|---|-----------|-----------|---|-------|--|---|
| Length | Width | Acc. Qty | | | | | | | | | | | | | | | |
| / | $W \leq 0.1$ | Ignore | | | | | | | | | | | | | | | |
| $L \leq 2.5$ | $0.1 < W \leq 0.2$ | 3 | | | | | | | | | | | | | | | |
| $L > 2.5$ | $0.2 < W$ | 0 | | | | | | | | | | | | | | | |
| Total | | 3 | | | | | | | | | | | | | | | |
| <p>05</p> | <p>Glass Crack (Minor Defect)</p> |  <p>Crack is potential to enlarge, any type is not allowed.</p> | | | | | | | | | | | | | | | |
| <p>06</p> | <p>Glass Chipping Pad Area: (Minor Defect)</p>  | <table border="1" data-bbox="863 1592 1334 1765"> <thead> <tr> <th>Length and Width</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$c > 3.0, b < 1.0$</td> <td>1</td> </tr> <tr> <td>$c < 3.0, b < 1.0$</td> <td>3</td> </tr> <tr> <td colspan="2">$a < \text{Glass Thickness}$</td> </tr> </tbody> </table> | Length and Width | Acc. Qty | $c > 3.0, b < 1.0$ | 1 | $c < 3.0, b < 1.0$ | 3 | $a < \text{Glass Thickness}$ | | | | | | | | |
| Length and Width | Acc. Qty | | | | | | | | | | | | | | | | |
| $c > 3.0, b < 1.0$ | 1 | | | | | | | | | | | | | | | | |
| $c < 3.0, b < 1.0$ | 3 | | | | | | | | | | | | | | | | |
| $a < \text{Glass Thickness}$ | | | | | | | | | | | | | | | | | |
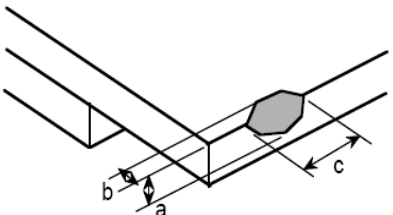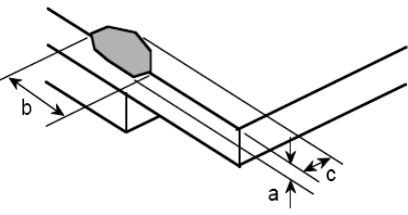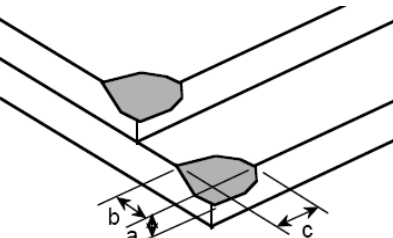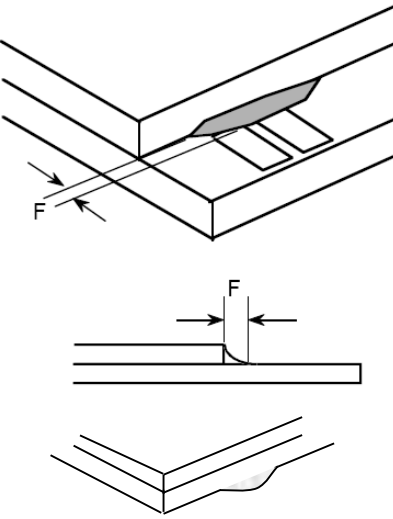
| <p>07</p> | <p>Glass Chipping Rear of Pad Area: (Minor Defect)</p>  | <table border="1"> <thead> <tr> <th>Length and Width</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$c > 3.0, b < 1.0$</td> <td>1</td> </tr> <tr> <td>$c < 3.0, b < 1.0$</td> <td>2</td> </tr> <tr> <td>$c < 3.0, b < 0.5$</td> <td>4</td> </tr> <tr> <td colspan="2">$a < \text{Glass Thickness}$</td> </tr> </tbody> </table> | Length and Width | Acc. Qty | $c > 3.0, b < 1.0$ | 1 | $c < 3.0, b < 1.0$ | 2 | $c < 3.0, b < 0.5$ | 4 | $a < \text{Glass Thickness}$ | |
|------------------------------|--|--|------------------|----------|--------------------|--------|------------------------------|---|--------------------|---|------------------------------|--|
| Length and Width | Acc. Qty | | | | | | | | | | | |
| $c > 3.0, b < 1.0$ | 1 | | | | | | | | | | | |
| $c < 3.0, b < 1.0$ | 2 | | | | | | | | | | | |
| $c < 3.0, b < 0.5$ | 4 | | | | | | | | | | | |
| $a < \text{Glass Thickness}$ | | | | | | | | | | | | |
| <p>08</p> | <p>Glass Chipping Except Pad Area: (Minor Defect)</p>  | <table border="1"> <thead> <tr> <th>Length and Width</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$c > 3.0, b < 1.0$</td> <td>1</td> </tr> <tr> <td>$c < 3.0, b < 1.0$</td> <td>2</td> </tr> <tr> <td>$c < 3.0, b < 0.5$</td> <td>4</td> </tr> <tr> <td colspan="2">$a < \text{Glass Thickness}$</td> </tr> </tbody> </table> | Length and Width | Acc. Qty | $c > 3.0, b < 1.0$ | 1 | $c < 3.0, b < 1.0$ | 2 | $c < 3.0, b < 0.5$ | 4 | $a < \text{Glass Thickness}$ | |
| Length and Width | Acc. Qty | | | | | | | | | | | |
| $c > 3.0, b < 1.0$ | 1 | | | | | | | | | | | |
| $c < 3.0, b < 1.0$ | 2 | | | | | | | | | | | |
| $c < 3.0, b < 0.5$ | 4 | | | | | | | | | | | |
| $a < \text{Glass Thickness}$ | | | | | | | | | | | | |
| <p>09</p> | <p>Glass Corner Chipping: (Minor Defect)</p>  | <table border="1"> <thead> <tr> <th>Length and Width</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$c < 3.0, b < 3.0$</td> <td>Ignore</td> </tr> <tr> <td colspan="2">$a < \text{Glass Thickness}$</td> </tr> </tbody> </table> | Length and Width | Acc. Qty | $c < 3.0, b < 3.0$ | Ignore | $a < \text{Glass Thickness}$ | | | | | |
| Length and Width | Acc. Qty | | | | | | | | | | | |
| $c < 3.0, b < 3.0$ | Ignore | | | | | | | | | | | |
| $a < \text{Glass Thickness}$ | | | | | | | | | | | | |
| <p>10</p> | <p>Glass Burr: (Minor Defect)</p>  | <table border="1"> <thead> <tr> <th>Length</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$F < 1.0$</td> <td>Ignore</td> </tr> </tbody> </table> <p>Glass burr don't affect assemble and module dimension.</p> | Length | Acc. Qty | $F < 1.0$ | Ignore | | | | | | |
| Length | Acc. Qty | | | | | | | | | | | |
| $F < 1.0$ | Ignore | | | | | | | | | | | |

| 11 | <p>FPC Defect: (Minor Defect)</p>  | <p>11.1 Dent, pinhole width $a < w/3$. (w: circuitry width.) 11.2 Open circuit is unacceptable. 11.3 No oxidation, contamination and distortion.</p> | | | | | | | | |
|----------------------------|---|---|----------|----------|---------------------|--------|----------------------------|------------|------------------|---------|
| 12 | <p>Bubble on Polarizer (Minor Defect)</p> | <table border="1" data-bbox="737 584 1209 757"> <thead> <tr> <th>Diameter</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$\varphi \leq 0.30$</td> <td>Ignore</td> </tr> <tr> <td>$0.30 < \varphi \leq 0.50$</td> <td>$N \leq 2$</td> </tr> <tr> <td>$0.50 < \varphi$</td> <td>$N = 0$</td> </tr> </tbody> </table> | Diameter | Acc. Qty | $\varphi \leq 0.30$ | Ignore | $0.30 < \varphi \leq 0.50$ | $N \leq 2$ | $0.50 < \varphi$ | $N = 0$ |
| Diameter | Acc. Qty | | | | | | | | | |
| $\varphi \leq 0.30$ | Ignore | | | | | | | | | |
| $0.30 < \varphi \leq 0.50$ | $N \leq 2$ | | | | | | | | | |
| $0.50 < \varphi$ | $N = 0$ | | | | | | | | | |
| 13 | <p>Dent on Polarizer (Minor Defect)</p> | <table border="1" data-bbox="737 837 1209 1010"> <thead> <tr> <th>Diameter</th> <th>Acc. Qty</th> </tr> </thead> <tbody> <tr> <td>$\varphi \leq 0.25$</td> <td>Ignore</td> </tr> <tr> <td>$0.25 < \varphi \leq 0.50$</td> <td>$N \leq 4$</td> </tr> <tr> <td>$0.50 < \varphi$</td> <td>None</td> </tr> </tbody> </table> | Diameter | Acc. Qty | $\varphi \leq 0.25$ | Ignore | $0.25 < \varphi \leq 0.50$ | $N \leq 4$ | $0.50 < \varphi$ | None |
| Diameter | Acc. Qty | | | | | | | | | |
| $\varphi \leq 0.25$ | Ignore | | | | | | | | | |
| $0.25 < \varphi \leq 0.50$ | $N \leq 4$ | | | | | | | | | |
| $0.50 < \varphi$ | None | | | | | | | | | |
| 14 | <p>Bezel</p> | <p>14.1 No rust, distortion on the Bezel. 14.2 No visible fingerprints, stains or other contamination.</p> | | | | | | | | |
| 15 | <p>Touch Panel</p> | <p>D: Diameter W: width L: length 15.1 Spot: $D < 0.25$ is acceptable $0.25 \leq D \leq 0.4$ 2dots are acceptable and the distance between defects should more than 10 mm. $D > 0.4$ is unacceptable 15.2 Dent: $D > 0.40$ is unacceptable 15.3 Scratch: $W \leq 0.03$, $L \leq 10$ is acceptable, $0.03 < W \leq 0.10$, $L \leq 10$ is acceptable Distance between 2 defects should more than 10 mm. $W > 0.10$ is unacceptable.</p> | | | | | | | | |
| 16 | <p>PCB</p> | <p>16.1 No distortion or contamination on PCB terminals. 16.2 All components on PCB must same as documented on the BOM/component layout. 16.3 Follow IPC-A-600F.</p> | | | | | | | | |
| 17 | <p>Soldering</p> | <p>Follow IPC-A-610C standard</p> | | | | | | | | |

| | | |
|----|-------------------------------------|---|
| 18 | Electrical Defect (Major Defect) | <p>The below defects must be rejected.</p> <p>18.1 Missing vertical / horizontal segment, 18.2 Abnormal Display. 18.3 No function or no display. 18.4 Current exceeds product specifications. 18.5 LCD viewing angle defect. 18.6 No Backlight. 18.7 Dark Backlight. 18.8 Touch Panel no function.</p> |
|----|-------------------------------------|---|

Remark: LCD Panel Broken shall be rejected. Defect out of LCD viewing area is acceptable.

11.7. Classification of Defects

- 11.7.1. Visual defects (Except no / wrong label) are treated as minor defect and electrical defect is major.
- 11.7.2. Two minor defects are equal to one major in lot sampling inspection.


11.8. Identification/marketing criteria

Any unit with illegible / wrong /double or no marking/ label shall be rejected.

11.9. Packing

- 11.9.1. There should be no damage of the outside carton box, each packaging box should have one identical label.
- 11.9.2. Modules inside package box should have compliant mark.
- 11.9.3. All direct package materials shall offer ESD protection.

Note1: Bright dot is defined as the defective area of the dot is larger than 50% of one sub-pixel area.

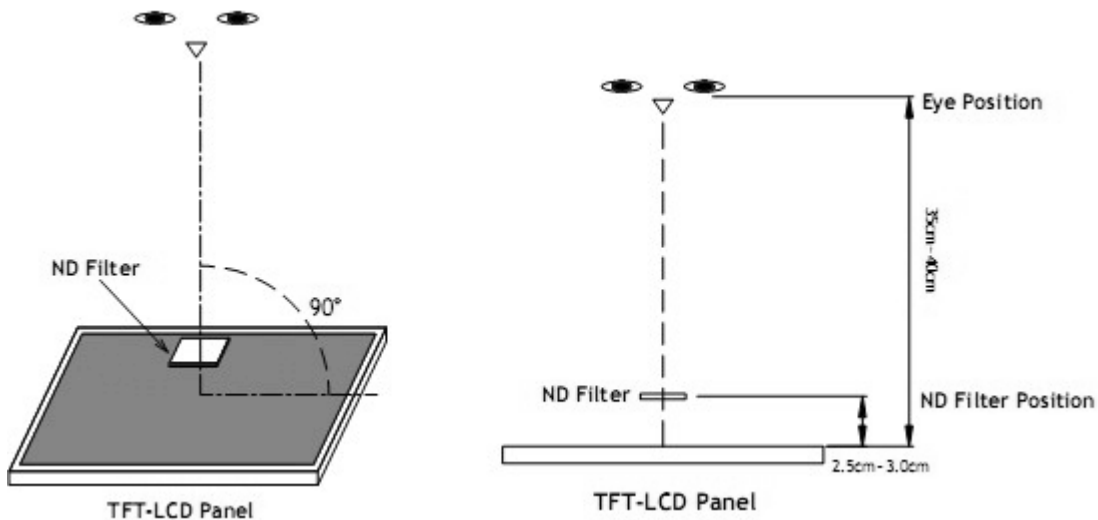

Bright dot: The bright dot size defect at black display pattern. It can be recognized by 2% transparency of filter when the distance between eyes and panel is 350mm±50mm.

Dark dot: Cyan, Magenta or Yellow dot size defect at white display pattern. It can be recognized by 5% transparency of filter when the distance between eyes and panel is 350mm±50mm.

Note2: Mura on display which appears darker / brighter against background brightness on parts of display area.

12. Reliability Specification

| No | Item | Condition | Quantity | Criteria |
|----|------------------------------|---|----------|------------------|
| 1 | High Temperature Operating | +70°C, 96Hrs | 2 | GB/T2423.2-2008 |
| 2 | Low Temperature Operating | -20°C, 96Hrs | 2 | GB/T2423.1-2008 |
| 3 | High Humidity Storage | +50°C, 90%RH, 96Hrs | 2 | GB/T2423.3-2016 |
| 4 | High Temperature Storage | +80°C, 96Hrs | 2 | GB/T2423.2-2008 |
| 5 | Low Temperature Storage | -30°C, 96Hrs | 2 | GB/T2423.1-2008 |
| 6 | Thermal Cycling Test Storage | -20°C, 60min~+70°C, 60min, 20 cycles. | 2 | GB/T2423.22-2012 |
| 7 | Packing vibration | Frequency range:10Hz~50Hz Acceleration of gravity:5G X, Y, Z 30 min for each direction. | 2 | GB/T5170.14-2009 |
| 8 | Electrical Static Discharge | Air: ±8kV 150pF/330 Ω 5 times Contact: ±4kV 150pF/330 Ω 5 times | 2 | GB/T17626.2-2018 |
| 9 | Drop Test (Packaged) | Height:80 cm,1 corner, 3 edges, 6 surfaces. | 2 | GB/T2423.8-1995 |

Note1. No deflection cosmetic and operational function allowable.

Note2. Total current Consumption should be below double of initial value

13. Precautions and Warranty

13.1. Safety

- 13.1.1. The liquid crystal in the LCD is poisonous. Do not put it in your mouth. If the liquid crystal touches your skin or clothes, wash it off immediately using soap and water.
- 13.1.2. Since the liquid crystal cells are made of glass, do not apply strong impact on them. Handle with care.

13.2. Handling

- 13.2.1. Reverse and use within ratings in order to keep performance and prevent damage.
- 13.2.2. Do not wipe the polarizer with dry cloth, as it might cause scratch. If the surface of the LCD needs to be cleaned, wipe it swiftly with cotton or other soft cloth soaked with petroleum IPA, do not use other chemicals.

13.3. Storage

- 13.3.1. Do not store the LCD module beyond the specified temperature ranges.
- 13.3.2. Strong light exposure causes degradation of polarizer and color filter.

13.4. Metal Pin (Apply to Products with Metal Pins)

13.4.1. Pins of LCD and Backlight

- 13.4.1.1. Solder tip can touch and press on the tip of Pin LEAD during the soldering

13.4.1.2. Recommended Soldering Conditions

Solder Type: Sn96.3~94-Ag3.3~4.3-Cu0.4~1.1



Maximum Solder Temperature: 370°C

Maximum Solder Time: 3s at the maximum temperature

Recommended Soldering Temp: 350±20°C

Typical Soldering Time: ≤3s

13.4.1.3. Solder Wetting



13.4.2. Pins of EL

- 13.4.2.1. Solder tip can touch and press on the tip of EL leads during soldering.

- 13.4.2.2. No Solder Paste on the soldering pad on the motherboard is recommended.

13.4.2.3. Recommended Soldering Conditions

Solder type: Nippon Alimit Leadfree SR-34, size 0.5mm

Recommended Solder Temperature: 270~290°C


Typical Soldering Time: ≤2s

Minimum solder distance from EL lamp (body):2.0mm


- 13.4.2.4. No horizontal press on the EL leads during soldering.

- 13.4.2.5. 180° bend EL leads three times is not allowed.

13.4.2.6. Solder Wetting




Recommended




Not Recommended

13.4.2.7. The type of the solder iron:




Recommended



Not Recommended

13.4.2.8. Solder Pad



13.5.Operation

- 13.5.1. Do not drive LCD with DC voltage
- 13.5.2. Response time will increase below lower temperature
- 13.5.3. Display may change color with different temperature
- 13.5.4. Mechanical disturbance during operation, such as pressing on the display area, may cause the segments to appear “fractured”.
- 13.5.5. Do not connect or disconnect the LCM to or from the system when power is on.
- 13.5.6. Never use the LCM under abnormal condition of high temperature and high humidity.
- 13.5.7. Module has high frequency circuits. Sufficient suppression to the electromagnetic interface shall be done by system manufacturers. Grounding and shielding methods may be important to minimize the interference.
- 13.5.8. Do not display the fixed pattern for long time (we suggest the time not longer than one hour) because it may develop image sticking due to the TFT structure.

13.6.Static Electricity

- 13.6.1. CMOS LSIs are equipped in this unit, so care must be taken to avoid the electro-static charge, by ground human body, etc.
- 13.6.2. The normal static prevention measures should be observed for work clothes and benches.
- 13.6.3. The module should be kept into anti-static bags or other containers resistant to static for storage.

13.7.Limited Warranty

- 13.7.1. Our warranty liability is limited to repair and/or replacement. We will not be responsible for any consequential loss.
- 13.7.2. If possible, we suggest customer to use up all modules in six months. If the module storage time over twelve months, we suggest that recheck it before the module be used.
- 13.7.3. After the product shipped, any product quality issues must be feedback within three months, otherwise, we will not be responsible for the subsequent or consequential events.

14. Outline Drawing

